


# Neo

## MULTIFUNCTIONS

NEOG122

12 x 2/1 GN

Item

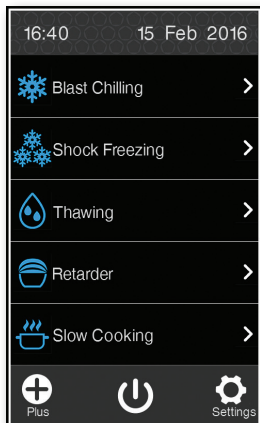


### 6 functions:

- **Blast Chilling +90 / +3°C • 194 / 37°F**
- **Shock Freezing +90 / -18°C • 194 / 0°F**
- **Thawing**
- **Leavening Retarder**
- **Slow Cooking / Holding**


### LCD 7" Touch Screen

7" colour screen (LCD - TFT - IPS) that is high definition and capacitive with "Touch Screen" functions. All the processes can be displayed with specific icons for each type of food, meats, fish, pastry, etc. The work process starts by touching the icon.




### Blast Chilling +90 / +3°C • 194 / 37°F

- It rapidly brings the product core temperature to +3°C (37°F), reduces natural product evaporation maintaining its humidity and preventing bacterial proliferation after cooking.
- Blast Chilling function lets you plan dishes in advance, increase productivity, keep flavour, colour, fragrance and weight unaltered and eliminate the risk of intoxication and waste.
- All the organoleptic properties are kept in tact due to perfect air and temperature control in the chamber.



### Shock Freezing +90 / -18°C • 194 / 0°F

- It rapidly brings the product core temperature to -18°C (0°F), keeping product structure and consistency in tact.
- Deep Freezing allows you to purchase products at their peak of freshness, maturity and availability on the market and preserve all their properties in tact.
- Thanks to a -40°C (-40°F), controlled air flow, the qualities of a fresh product can be preserved in time.




### Thawing

- To control and determine product thawing means keeping the organoleptic properties in tact and optimising stock, avoiding useless waste.
- Thawing occurs in maximum food safety conditions, by the slow reabsorption of the micro-crystallised water in food.
- The ideal cycle for products to be served raw or cold, like fish or bakery products, since it does not damage the molecular structure.



### Leavening Retarder

- "Just in time" production flexibility is the best way to optimise resources, manage time and meet demand variability.
- Direct or programmed leavening can be selected: you prepare, leave to rise, block leavening and decide baking phase programming.
- All this will an accurate control of humidity to always achieve perfect results.



### Slow Cooking and Holding

- Temperature control and keeping it within set values allows for preparations that safeguard not only the flavour and taste, but moistness and softness for extremely satisfying results.
- This function is very easy to use and perfect to keep food warm during service, helping to improve preparation and organisation.
- This cycle can also be used in baking to melt chocolate or candy fruit.

## GENERAL FEATURES

- External sides and top in AISI 304 18/10 stainless steel th. 0,6 mm (0.02").
- Door in AISI 304 18/10 stainless steel th. 0,8 mm (0.03").
- Cavity with rounded corners, fully made in AISI 304 18/10 stainless steel.
- Cavity with central drain for discharge of washing water.
- High-density polyurethane insulation (about 42 kg/m<sup>3</sup> - 2.7 Lbs/ft<sup>3</sup>), thickness 60 mm (2.36"), without HCFC.
- Heating element in the door frame.
- Ergonomic handle on the complete door length and magnetic gaskets on the 4 sides of the door.
- Patented humidity injection system.

## INTERNAL SETUP

- Stainless steel AISI 304 18/10 trayholder, configurable for using 2/1 GN.
- "L" shaped stainless steel AISI 304 18/10 guides, removable and adjustable in height every 15 mm (0.6").
- Heated core probe, with 4 measuring point.

## COOLING SYSTEM

- Indirect blowing electronic fans, efficient but gentle on food.
- Semi-hermetic compressor
- R404A refrigerant.
- High performance evaporators, with multiple gas injection points.
- Copper-aluminium evaporator with cataphoresis anticorrosion treatment.
- High performance copper-aluminium condenser.
- Patented hot gas defrosting system for the evaporator.

## CONTROLS AND SAFETY DEVICES

- 7" touch capacitive IPS high resolution display on the door, very user friendly.
- Quick connection for shower, standard.
- Automatic defrosting cycles, standard.
- Water loading solenoid, standard.
- Circuit breaker for compressor protection.
- Internal fan stop by micro switch when door is opened.

## WI-FI CONNECTIVITY

- HACCP Monitoring.
- Remote Service.

## SPECIAL FUNCTIONS

- Cookbook
- My recipes
- Needle probe heating
- Sterilization
- Hot gas defrost
- Pre-Cooling
- Drying
- Continuous cycle

## STANDARD EQUIPMENT

- Heated core probe, with 4 measuring point
- USB connection for Upload and Download
- Side runners
- Wi-Fi connection

## EXTRA ACCESSORIES

- Reversed door opening on request without extra charge
- Version with remote unit
- Water condensed cooling system
- Revolving caster with brake kit
- Hand shower

## CLEANING AND MAINTENANCE




- Manual cleaning with external hand shower (optional)

## TECHNICAL DATA

Dimensions	Width	mm • Inch	1100 • 43.31"
	Depth	mm • Inch	1050 • 41.34"
	Height	mm • Inch	1800 • 70.87"
Feet ø 2"	Height	mm • Inch	150 • 5.91"
Door span	Width	mm • Inch	670 • 26.38"
	Height	mm • Inch	830 • 32.68"
Internal working	Depth	mm • Inch	900 • 35.43"
PU insulation	Thickness	mm • Inch	60 • 2.36"
Climate class			T
Blast Chilling capacity in 90'	+90 / +3°C • 194 / 37°F	kg • Lbs	72 • 159
Deep Freezing capacity in 240'	+90 / -18°C • 194 / 0°F	kg • Lbs	48 • 106
Cooling power (1)		W	9,986
Heating power		W	1,600
Cooling power absorption (2)		kW	6.0
Heating power absorption		kW	1.9
Consumption		Amps	13.8
Electrical power supply	~ / V / Hz		3ph / 208 / 60 Hz
Coolant	Type		R404A
	Quantity	kg • Lbs	4 • 8.81
Capacity		n°	12 x 2/1 GN
Distance between layers		mm • Inch	60 • 2.36"
External dimensions packaging	Width	mm • Inch	1160 • 45.66"
	Depth	mm • Inch	1110 • 43.70"
	Height	mm • Inch	1955 • 76.96"
Net weight		kg • Lbs	306 • 674

(1) T. evap.= -25°C (-13°F) / T. cond.= 45°C (+113°F)

(2) T. evap.= -15°C (+5°F) / T. cond.= 55°C (+131°F)

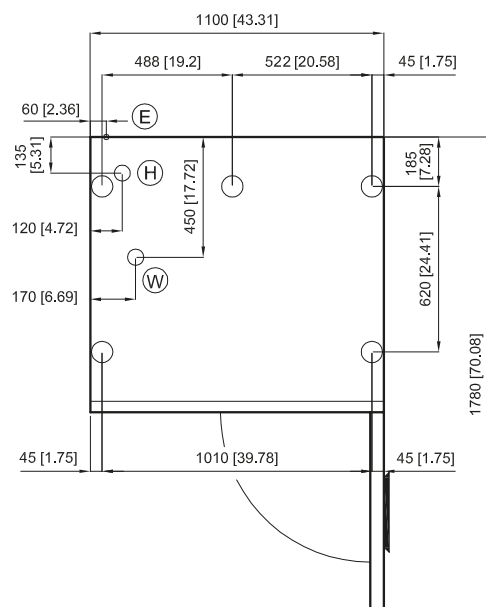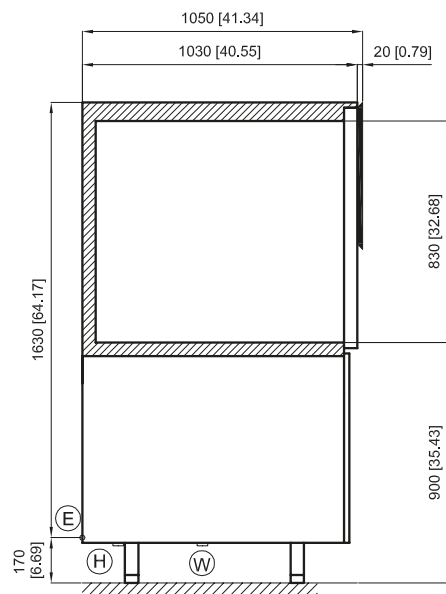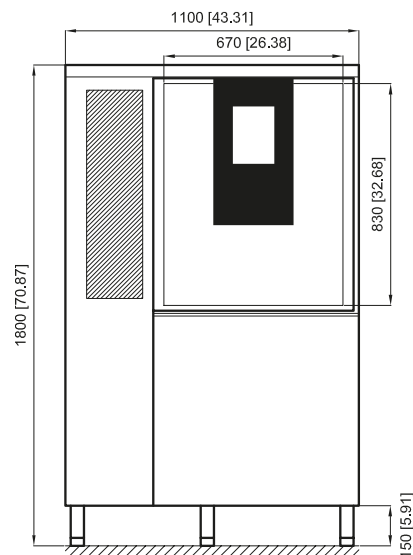

mm [inch]

- Ⓔ Electrical connection
- Ⓕ Water supply input - Ø 3/4"
- Ⓖ Water drain pipe - Ø 1"

The specifications shown in this document are to be considered not binding. The company reserves the right to make technical changes at any moment.

16.06.2020

**LAINOX®**

**LAINOX ALI Group Srl**  
Via Schiaparelli 15  
Z.I. S. Giacomo di Veglia  
31029 Vittorio Veneto (TV) · Italy

Tel +39 0438 9110  
Fax +39 0438 912300  
lainox@lainox.com  
www.lainox.com

