

ORACGB

HIGH SPEED OVEN - ALL IN ONE. COMBI WAVE / HIGH SPEED OVEN - BOOSTED VERSION (STEEL)



 *High Speed Oven*  *Combi Wave*

Features



HIGH SPEED OVEN

An operating mode that simultaneously uses convection, microwave and impingement modes, with temperatures from 100°C to 300°C [212°F to 572°F].



COMBI WAVE

In Combi Wave mode, Oracle can be used as a convection oven with temperatures from 30°C to 300°C [86°F to 572°F], as a microwave oven with power up to 2000W or with a combination of the two cooking methods to achieve results that always exceed expectations.



CONNECTED

Oracle connects free-of-charge to Lainox's Nabook plus portal via the standard- supply Wi-Fi and ethernet features giving you a 4.0 kitchen (find out more on nabookplus.cloud).



OOS - ORACLE ODORLESS SYSTEM

A labyrinth baffle catalyst filter containing platinum particles which help to reduce steam, odours and grease residue during cooking. The Oracle Odorless System does not require any cleaning or routine maintenance work. Its efficiency is always guaranteed.



FAST COOKING SYSTEM

Rely on Lainox's know-how by using the automatic, tried-and-tested recipes for high-speed cooking in High Speed Oven mode.



MICROWAVE COOKING SYSTEM

Rely on Lainox's know-how by using the automatic, tried-and-tested recipes for cooking in Combi Wave mode.



OWB - ORACLE WASHABLE BOX

A special Teflon oven chamber which can be removed and washed for the next round of cooking, making the cleaning procedure fast and cost-effective.

Capacity

Capacity	17,9 lt.		
----------	----------	--	--

Dimensions

Width	<i>mm</i>	467	<i>inch</i>	18.4
Depth	<i>mm</i>	609	<i>inch</i>	24.0
Height	<i>mm</i>	630	<i>inch</i>	24.8
Maximum outer width	<i>mm</i>	467	<i>inch</i>	18.4
Max exterior depth	<i>mm</i>	657	<i>inch</i>	25.9
Maximum exterior height	<i>mm</i>	630	<i>inch</i>	24.8
Packaging width	<i>mm</i>	600	<i>inch</i>	23.6
Packing depth	<i>mm</i>	800	<i>inch</i>	31.5
Packaging height	<i>mm</i>	800	<i>inch</i>	31.5
Weight	<i>kg</i>	63	<i>lbs</i>	138.9
Gross weight	<i>kg</i>	75	<i>lbs</i>	165.4
Volume	<i>m3</i>	0.18	<i>ft3</i>	6.4
Packing volume	<i>m3</i>	0.384	<i>ft3</i>	13.6
Cooking compartment width	<i>mm</i>	310	<i>inch</i>	12.2
Cooking compartment depth	<i>mm</i>	320	<i>inch</i>	12.6
Cooking chamber dimensions	<i>mm</i>	180	<i>inch</i>	7.1
Support base width	<i>mm</i>	426	<i>inch</i>	16.8
Base dimensions	<i>mm</i>	510	<i>inch</i>	20.1
Cable length	<i>m</i>	2	<i>ft</i>	6.56

Power supply

Consumption	<i>A</i>	(1) 23 / (2) 24 / (3) 23
Frequency	<i>Hz</i>	60
Total electric power	<i>kW</i>	5,3
Microwave	<i>kW</i>	2
Impingement	<i>kW</i>	(1) 3 / (2) 2,2 / (3) 2,2

HOW TO USE

- Programmable mode: possibility of programming and storing a recipe with its cooking procedures in automatic sequence.
- High Speed Oven. - FCS (Fast Cooking System) automatic cooking system for Italian and international recipes, including the history, ingredients, cooking accessories, method and automatic cooking program. - Manual mode with instant start.
- Combi Wave. - MCS (Microwave Cooking System) automatic cooking system for Italian and international recipes, including the history, ingredients, cooking accessories, procedure and automatic cooking program. - Manual mode with three instant start cooking methods: convection, microwave or combined convection + microwave.

CONNECTIVITY

- Nabook plus - Thanks to the Cloud feature, it is possible to access Nabookplus, the virtual kitchen assistant (read more on nabookplus.cloud, free registration).
- Recipe creation including ingredients with procedure and photo.
- Direct access by Oracle to the recipe database with download option (patented).
- Synchronisation of multiple Oracle ovens connected to the same account (patented).
- HACCP monitoring.
- Remote diagnosis via Nabook plus portal by Lainox Service Centers.
- Automatic software update notification system.
- Possibility to download recipes from the Nabook plus portal based on country.
- Possibility to run automatic software updates on multiple devices simultaneously.
- Wi-Fi connection. Compatible with IEEE 802.11g (2.4 GHz) standard.

CONTROL MECHANISMS

- Automatic fan speed for High Speed Oven mode.
- Possibility of choosing the fan speed.
- USB connection to download HACCP data, update software and upload/download cooking recipes.

STRUCTURAL CHARACTERISTICS

- Pull-down door with ergonomic handle.
- Perfectly smooth room.
- Integrated catalyst filter for operation without hood.
- When open, the door slides under the cooking surface of the oven, allowing the food to be removed safely without the risk of burns.

OPERATION

- Display that can be configured based on the user's needs, bringing forward the programmes used most.
- Organisation of recipes in folders with preview, giving each folder its own name.
- 7" colour screen (LCD, high definition, capacitive, with "Touch Screen" functions).
- User interface with a choice of 29 languages.
- Starting an automatic "One Touch" cooking.
- Possibility of preheating the cooking chamber up to 300°C [572°F] .
- Rapid cooling of the cooking chamber with open door.
- There are about 30 recipes available in Oracle and a growing number of alternative ones are available via access to the Nabook plus portal. Each recipe has been tested to guarantee best results.
- Oracle coach. Virtual assistant that provides advice on using Oracle and informs when maintenance is needed.

SAFETY FEATURES

- Door open/closed electronic sensor.
- Self-diagnosis with smart error viewing.
- Maximum external door front temperature of 65°C [149°F].
- Compliant with the IEC60335-1, IEC60335-2-90 and EMC international standards.

CLEANING AND MAINTENANCE

- OWB - Oracle Washable Box. Special removable and washable box chamber.
- Easy exterior cleaning thanks to perfectly smooth surfaces, and IPX3 water jet protection rating.

INSTALLATION AND ENVIRONMENT

- 100% recyclable packaging.
- Product recycling rate: 90%.
- Quality ISO 9001 / Safety ISO 45001 / Environmental ISO 14001 certification.

STANDARD EQUIPMENT


- Ethernet connection
- Aluminium peel (190 x 330 x 50 mm)
- Oracle Washable Door Cover. Removable and washable inner door protection
- Oracle Washable Box
- Anodized aluminum alloy plate
- Wi-Fi connection. Compatible with IEEE 802.11g (2.4GHz) standard
- USB connection
- Power cable - 6 ft
- Electric plug - only for 2P version

OPTIONAL TO BE REQUESTED WHEN ORDERING

MPACK: Multipack packaging - 6 pcs mixed in a single package - 1200 x 800 x 2170 h - 415 kg - 2,08 m3. Not compatible with optional SOPPRS

SOWBHD: Extra charge for Oracle Washable Box Heavy Duty version OWBHD. Replaces the standard model

SOPPRS: Panini Stone Press kit (consisting of Panini Stone Press OPPRS - dedicated Oracle Washable Box OWBPRS - special paddle OPFAPRS) + preparation on the oven. Oracle Washable Box standard excluded from standard equipment. Not compatible with MPACK multipack packaging

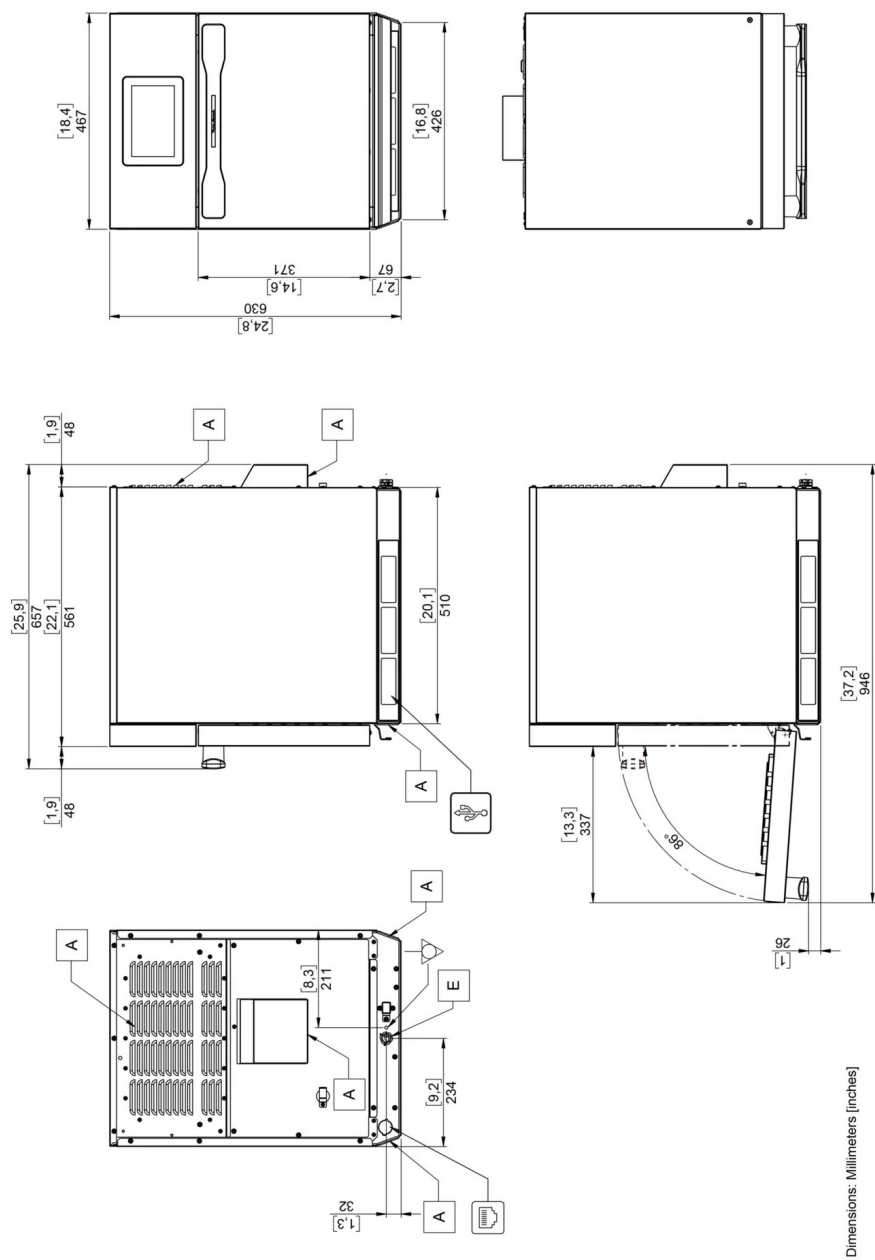

A	Technical compartment cooling air intake	E	Electric power supply cable inlet	USB connection	Ethernet connection
---	--	---	-----------------------------------	----------------	---------------------

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice